

## R40E Series

### 4" Standard Pressure Vessel

#### About ROPV

The ROPV technical team is composed of highly knowledgeable and capable team from the FRP Institute specializing in advanced polymer materials, with over 150 combined years of technical and industry experience in composite design and manufacturing.

The ROPV laboratory is an integrated physical and chemical laboratory equipped with advanced equipment to perform testing and analysis in the areas of:

- Finite Element Analysis
- Resin System Research
- Fatigue Test of Complex Material Compositions


Today ROPV is the largest pressure vessel manufacturer in China with headquarters in Harbin, Heilongjiang Province, China; manufacturing facility in Dezhou, Shandong Province and global sales office in San Francisco, California, USA.

#### OVERVIEW

The ROPV R40E series model accommodates standard make 4" membrane filtration elements. Manufactured to very exacting specifications with only the highest quality materials for continuous use. Our pressure vessels operate within a temperature range of 14–150°F (-10–66°C), at operating pressures of up to 1,200 PSI / 83 Bar. Individual units are hydro-tested prior to shipment to ensure only the highest quality and stable performance.



Low Pressure Vessel

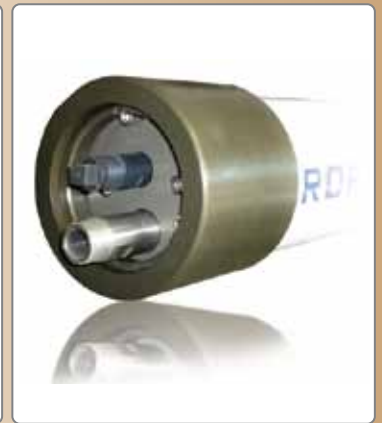

High Pressure Vessel

#### APPLICATION

Our pressure vessels were developed for permeate and feed/concentrate with variable port options, connection types and sizes. They're fully customizable and are offered as OEM equipment for UF, EDI, Large Diameter Membranes and Emerging Water Treatment Technologies.

#### FEATURES

- Easy installation and maintenance
- Constructed for best chemical compatibility and corrosion resistance
- Fully customizable and configured based on customer requirements
- Available in the following pressure ratings:  
300 Psi, 450 Psi, 600 Psi, 1000 Psi, 1200 Psi

# Product Datasheet

Model R40E 4" Standard Pressure Vessel

## R40E Series

Model	Design/ Operating Pressure	Max. Operating Temperature	Min. Operating Temperature	Qualification Pressure	Element Length
R4040B300E	300 Psi / 21 Bar	150° F / 66°C	14°F / -10°C	1800 Psi / 126 Bar	40" X (1-6)
R4040B450E	450 Ps / 31 Bar	150° F / 66°C	14°F / -10°C	2700 Psi/186 Bar	40" X (1-6)
R4040B600E	600 Psi / 41 Bar	150° F / 66°C	14°F / -10°C	3600 Psi/246 Bar	40" X (1-6)
R4040B1000E	1000 Psi / 69 Bar	150° F / 66°C	14°F / -10°C	6000 Psi/414 Bar	40" X (1-6)
R4040B1200E	1200 Psi / 83 Bar	150° F / 66°C	14°F / -10°C	7200 Psi/498 Bar	40" X (1-6)

**ROPV** Committed to Quality and Technology

HEADQUARTERS  
 Room 2501, Pufa Plaza No. 209  
 Changjiang Road, Nangang District  
 Harbin, P.R. China  
 TEL +86 451 8226 7301  
 FAX +86 451 8226 7303  
 POSTCODE 150090  
 EMAIL ropv@ropv.com.cn

USA  
 ADDRESS P.O. Box 355  
 Brentwood, CA 94513  
 TEL +1 925-237-0184  
 FAX +1 925-264-1951  
 EMAIL globalmarket@ropv.com.cn



**WRAS**  
 Water Regulations Advisory Scheme

ASME International

ACS, ASME International, CNAS, ISO, OHSAS, UL, WRAS are registered trademarks.

©2010 ROPV reserves the right to modify the design and specification contained herein without prior notice. Please contact your local ROPV sales representative for the most current information.

Doc. No. ROPV-PDS-2010-05-002A-EN  
 Printed in P.R. China